




**BCOMPACT**  
CREATE SPACE

Bcompact Design Pty. Ltd.  
Po. Box 206. 2258, Sydney, Australia  
p: +61413769303  
w: [www.bcompact.com](http://www.bcompact.com)  
e: [info@bcompact.com](mailto:info@bcompact.com)  
ACN: 637472407

## Original Bcompact Side Folding Ladder

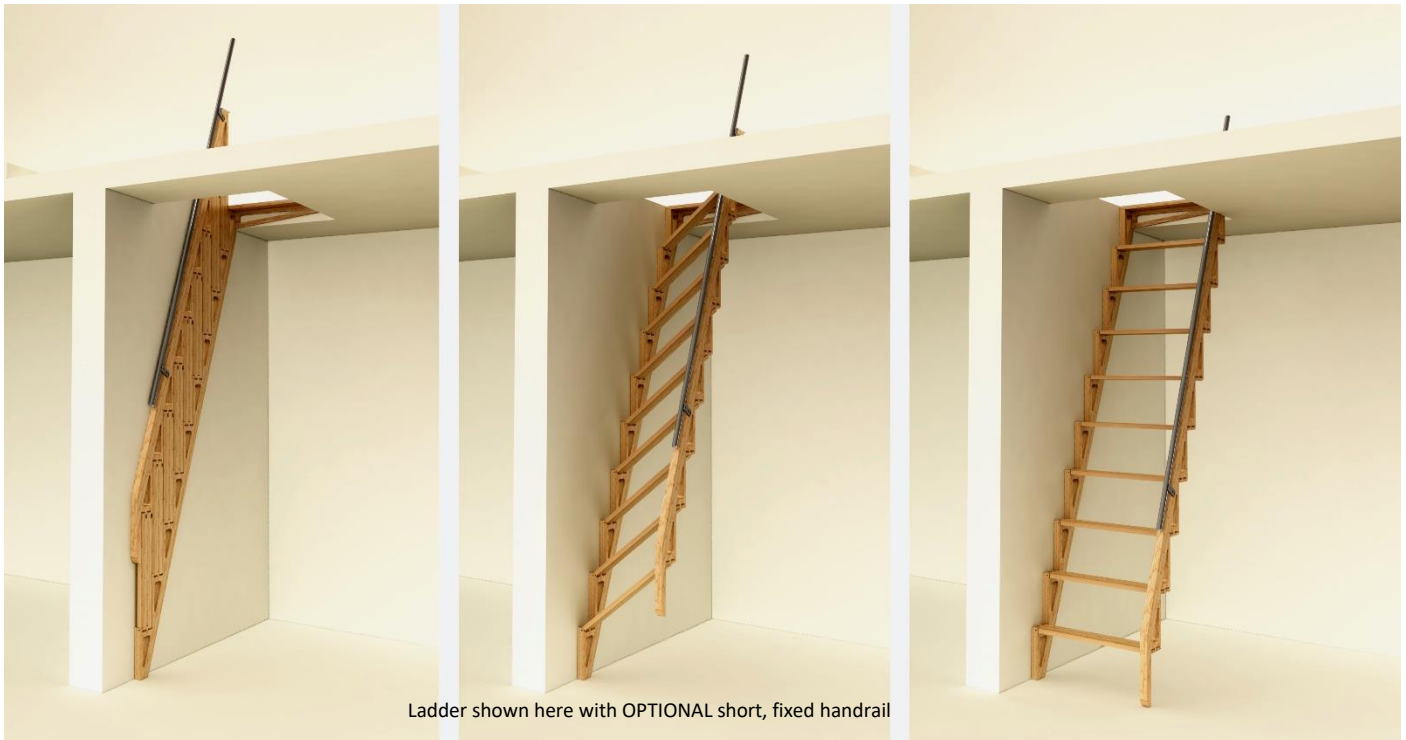

## the simple product

A simplistic cut back budget option of the Hybrid stair, to replace any Aluminium mobile ladder, folding attic ladders & some staircases.

Purely the Bamboo sideways folding structure & spring mechanism.

Pricing varies with the height, features & finish of product.

These products are custom sized to your exact specifications & priced accordingly.

Ladders cover heights between 1.2 meters and 3.7 meters with angles between 60 and 70 degrees.

Standard width of 715mm wide with varying tread rise to suit location & budget. Now also available in new narrow version of 575mm wide.

## Materials & Colours (Please note: Solid White is no longer available)

Sustainably sourced Bamboo Ply





	Standard Narrow LADDER	Premium Wide LADDER
<b>A</b>	Height Range: 1.5m – 3.7m / 47.2" – 145.7"	Height Range: 1.2 m – 3.7m / 47.2" – 145.7"
<b>B</b>	Angle Range: 60 – 70 degrees	Angle Range: 60 – 70 degrees
<b>C</b>	Overall Width Unfolded: 575mm / 22.64" (581mm / 22.87" at 2 points with fixed handrail)	Overall Width Unfolded: 715mm / 28.15" (721mm / 28.39" at 2 points with fixed handrail)
<b>D</b>	Overall Width Folded: 40mm / 1.57" (46mm / 1.57" at 2 points with fixed handrail)	Overall Width Folded: 40mm / 1.57" (46mm 1.57" at 2 points with fixed handrail)
<b>E</b>	Tread Rise Height Range: 285mm – 400mm / 11.22" – 15.75"	Tread Rise Height Range: 285mm – 400mm / 11.22" – 15.75"
<b>F</b>	Tread dimensions: 142mm x 560mm x 25mm / 5.59" x 22.05" x 0.98"	Tread dimensions: 142mm x 700mm x 25mm / 5.59" x 27.56" x 0.98"
<b>G</b>	Ceiling Access Hole Requirement: Length will be proportional with angle of Ladder (G2), Width min. of 575mm / 22.64" (no Handrail) 588mm / 23.15" (with Handrail)	Ceiling Access Hole Requirement: Length will be proportional with angle of Ladder (G2), Width min. of 725mm / 28.15" (no Handrail) 750mm / 28.54" (with Handrail)
<b>H</b>	Height above upper level in folded position: 550mm / 21.65" (no handrail), (H2) 1000mm-1100mm / 39.37"- 43.31" (with standard bracket & fixed stand-off rail) (H2) 1000mm-1200mm / 39.37"- 47.24" (with extended bracket & fixed stand-off rail)	Height above upper level in folded position: 676mm / 26.61" (no handrail), (H2) 1150mm-1250mm / 45.28"-49.21" (with standard bracket & fixed stand-off handrail) (H2) 1300mm-1350mm / 51.18"-53.15" (with extended bracket & fixed stand-off handrail)
	Optional Extra: Fixed Stand-Of Aluminium Handrail: <ul style="list-style-type: none"> <li>- <u>Standard</u> Bracket Size (100mm): approx. 38.5mm rail height stand-off Stringer</li> <li>- <u>Extended</u> Bracket Size (300mm): approx. 210mm rail height stand-off Stringer</li> </ul> <p>(Ladders <u>do NOT</u> come standard with a bi-folding Aluminium handrail mechanism and rail.)</p>	Optional Extra: Fixed Stand-Of Aluminium Handrail: <ul style="list-style-type: none"> <li>- <u>Standard</u> Bracket Size (100mm): approx. 38.5mm rail height stand-off Stringer</li> <li>- <u>Extended</u> Bracket Size (300mm): approx. 210mm rail height stand-off Stringer</li> </ul> <p>(Ladders <u>do NOT</u> come standard with a bi-folding Aluminium handrail mechanism and rail.)</p>

