## Description

The Sellwood range of Pivotal Ladders - Aluminium (PLA) provide safe, easy access onto roofs, mezzanine floors and platform areas that are at height. The pivoting system at the top of the ladder allows for the ladder be pivoted from a  $70^{\circ}$  angle when in use to a  $90^{\circ}$  angle when not in use, creating clear space at the base of the ladder. The Sellwood PLA Ladders are custom designed, manufactured to suit each application and available in any height, up to 4m

# **Pivotal Ladder Range**

Model	Height	Weight Approx.	Handrails
PLA1000	Up to 1000mm	4kg	X
PLA1000-1500	1000mm - 1500mm	4kg – 7kg	X
PLA1500-2000	1500mm - 2000mm	7kg – 10kg	$\checkmark$
PLA2000-3000	2000mm - 3000mm	10kg – 16kg	$\checkmark$
PLA3000-4000	3000mm - 4000mm	16kg – 21kg	✓

## **Specification**

#### **Features**

Heavy duty grip treads 300kg load rating 70° climbing angle Ladder - anodised aluminium finish Built to height as required Design and manufactured in NZ

#### Materials

Stringer: anodised aluminium 2mm channel extrusion Tread: anodised aluminium grip tread 70° angled extrusion Handrail: aluminium 50mm OD round tube extrusion Fixing brackets: aluminium unequal angle extrusion Bracing gussets: steel 180mm silver passivated Ladder feet: rubber universal non marking

Rivets: steel 4.8mm 6-3 domed

# Compliance


Sellwood Pivotal Ladders comply with NZBC D1/AS1 5.0 - Fixed Ladders

#### Installation

Download full installation instructions from www.sellwood.co.nz

### Warranty

The Sellwood Pivotal Ladder Warranty is 10 Years from date of purchase. Warranty is subject to installation and usage in accordance to Sellwood Products specifications.

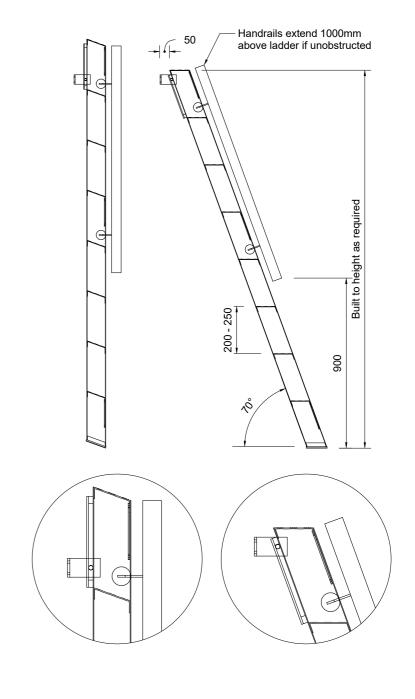

<sup>&</sup>quot;Pivotal Ladder shall be a PLA... available from Sellwood Products Ltd."