

Replace lid (Foldaway Range)


How to replace a Foldaway attic ladder lid where the attic ladder is not installed.

Models: FT30, FA30, FTW30

1. Place the attic ladder on a table or workbench so the lid is sitting on the surface.




2. Remove the 4x screws in the brackets that connect the ladder to the lid.

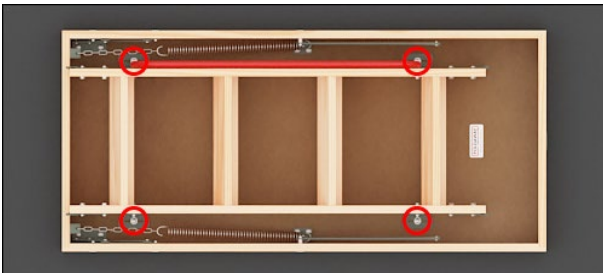


3. Move the ladder and brackets to the side out of the way.



4. Remove the 4x screws that connect the stay arms to the lid.

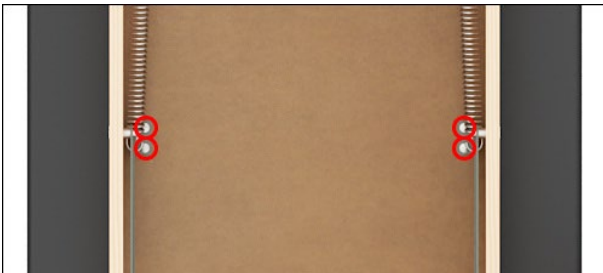


5. Remove the 4x screws that connect the left and right main hinges to the lid.

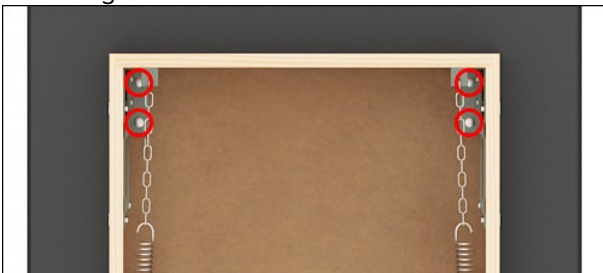


6. Remove the old lid and place the replacement lid in the same position.



7. Refix the 4x screws that connect the left and right main hinges to the lid using the predrilled holes.

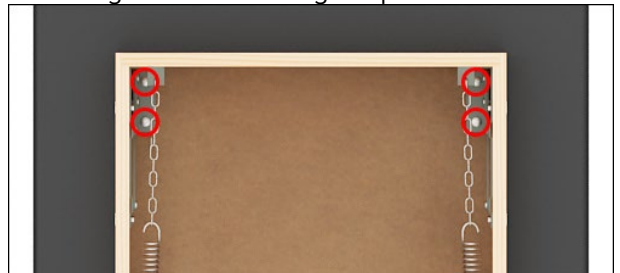

8. Refix the 4x screws that connect the stay arms to the lid using the predrilled holes.

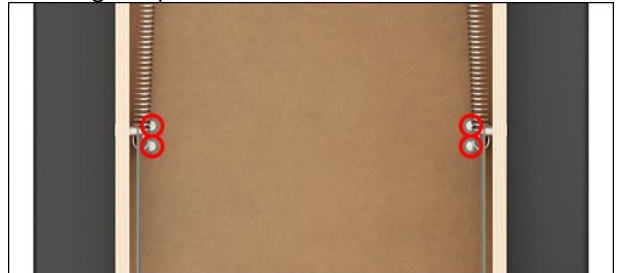

9. Place the ladder and brackets onto the new lid and refix the 4x screws into the lid using the predrilled holes.

