












Specifications

Range	Retractable Ladder				
Model	A25	A28	A31	A34	A36
Ceiling Height	2300-2500	2550-2800	3000-3160	3250-3400	3500-3660
Opening Required	1220x650	1370x650	1440x650	1525x650	1525x650
Max Load	300kg	300kg	300kg	300kg	300kg
Angle	70°	70°	70°	70°	70°
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Tread Profile					
Tread Depth	100	100	100	100	100
Ladder Width	425	425	425	425	425
Projection	1467	1589	1801	1892	2027
Landing Space	1092	1201	1332	1420	1514
Handrail	✓	✓	✓	✓	✓
Rubber Feet	✓	✓	✓	✓	✓
Uses	Commercial				

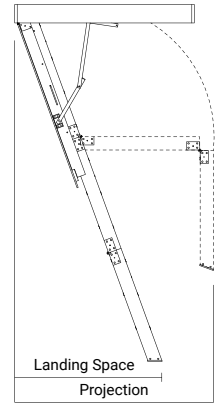

Range	Fixed Ladder (FLA) & Pivotal Ladder (PLA)				
Models	FLA/PLA1000	FLA/PLA1000-2000	FLA/PLA2000-3000	FLA/PLA3000-4000	FLA/PLA4000-5000
Height	up to 1000	1000 - 2000	2000 - 3000	3000 - 4000	4000 - 5000
Max Load	300kg	300kg	300kg	300kg	300kg
Angle	70°	70°	70°	70°	70°
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Tread Profile					
Tread Depth	100	100	100	100	100
Ladder Width	446	446	446	446	446
Handrails	-	-	✓	✓	✓
Uses	Commercial				

Range	Roof Hatch				
Model	SRH900700	SRH800800	SRH1200700	SRH1200900	SRH1500700
Trim Size	900 x 700	800 x 800	1200 x 700	1200 x 900	1500 x 700
Upstand	250	250	250	250	250
Thickness	2.5	2.5	2.5	2.5	2.5
Barrier	RHB900700	RHB800800	RHB1200700	RHB1200900	RHB1500700
Uses	Commercial				