


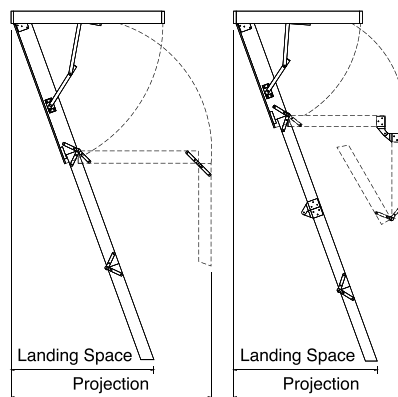







# Specifications

Range	Retractable Ladder		
Model	A25	A28	A36
Ceiling Height	2300-2500	2550-2800	2800-3660
Opening Required	1400x650	1400x650	1400x650
Max Load	300kg	300kg	300kg
Angle	70°	70°	70°
Material	Aluminium	Aluminium	Aluminium
Tread Profile			
Tread Depth	100	100	100
Ladder Width	425	425	425
Landing Space	1088-1159	1180-1268	1268-1660
Projection	1537	1658	1777
Stack Height	423	423	529
Handrail	✓	✓	✓
Rubber Feet	✓	✓	✓
Insulated Lid	✓	✓	✓



**Uses** Commercial

Range	Fixed Ladder (FLA) & Pivotal Ladder (PLA)				
Models	FLA/PLA1000	FLA/PLA1000-2000	FLA/PLA2000-3000	FLA/PLA3000-4000	FLA/PLA4000-5000
Height	up to 1000	1000 - 2000	2000 - 3000	3000 - 4000	4000 - 5000
Max Load	300kg	300kg	300kg	300kg	300kg
Angle	70°	70°	70°	70°	70°
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Tread Profile					
Tread Depth	100	100	100	100	100
Ladder Width	446	446	446	446	446
Handrails	-	-	✓	✓	✓

**Uses** Commercial

Range	Roof Hatch				
Model	SRH900700	SRH800800	SRH1200700	SRH1200900	SRH1500700
Trim Size	900 x 700	800 x 800	1200 x 700	1200 x 900	1500 x 700
Upstand	250	250	250	250	250
Thickness	2.5	2.5	2.5	2.5	2.5
Barrier	RHB900700	RHB800800	RHB1200700	RHB1200900	RHB1500700

**Uses** Commercial