

Specifications

Range	Premier		Deluxe			Truss	
Model	P30	P36	D28	D30	D36	Q24	Q27
Ceiling Height	2250-3050	3050-3660	2250-2800	2800-3100	3100-3660	2250-2440	2300-2700
Opening Required	1300x600	1300x600	1400x650	1450x650	1450x650	835x650	835x650
Max Load	200kg	200kg	250kg	250kg	250kg	200kg	200kg
Angle	68°	68°	63°	63°	63°	70°	70°
Material	Timber	Timber	Timber	Timber	Timber	Timber	Steel/Timber
Tread Profile							
Tread Depth	80	80	120	120	120	80	80
Ladder Width	380	380	430	430	430	430	430
Landing Space	1095-1414	1418-1667	1337-1634	1362-1770	1770-2055	1005-1076	1010-1155
Projection	1770	1763	1854	1994	1995	1238	1218
Stack Height	320	410	400	400	525	420	290
Handrail	✓	✓	✓	✓	✓	✓	✓
Rubber Feet	✓	✓	✓	✓	✓	✓	✓
Insulated Lid	✓	✓	✓	✓	✓	✓	✓
Warranty (years)	15	15	15	15	15	15	15


Uses

Residential

Range	Commercial		
Model	A25	A28	A36
Ceiling Height	2300-2450	2550-2700	2700-3660
Opening Required	1400x650	1400x650	1400x650
Max Load	200kg	200kg	200kg
Angle	70°	70°	70°
Material	Aluminium	Aluminium	Aluminium
Tread Profile			
Tread Depth	100	100	100
Ladder Width	425	425	425
Landing Space	1088-1141	1180-1232	1232-1581
Projection	1517	1621	1777
Stack Height	423	423	529
Handrail	✓	✓	✓
Rubber Feet	✓	✓	✓
Insulated Lid	✓	✓	✓
Warranty (years)	5	5	5

Uses

Commercial

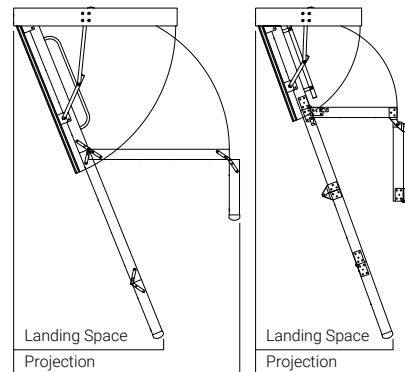

Installation Guide

