

Replace lid (Sellwood Range)

How to replace a Sellwood attic ladder lid where the attic ladder is not installed.

Models: P30, D28, D30, D36, Q24, A25, A28, A36

1. Place the attic ladder on a table or workbench so the lid is sitting on the surface.




2. Release the spring tension by undoing the 2x M8 bolt and nylock nuts that connect the upper and lower stay arms together.




3. Lift the attic ladder frame so it sits in a vertical position perpendicular to the workbench.



4. Remove the 4x M6 screws that connect the lower anchors to the lid.

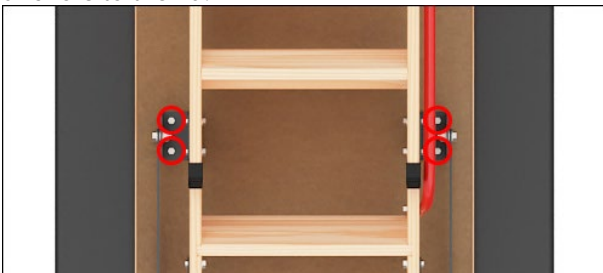

5. Remove the 4x M6 screws that connect the main hinge to the lid.

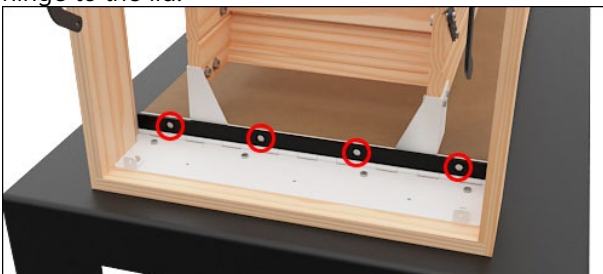


6. Remove the old lid and place the replacement lid in the same position.



7. Refix the 4x M6 screws that connect the main hinge to the lid starting with the outside predrilled holes first.



8. Refix the 4x M6 screws that connect the lower anchors to the lid.

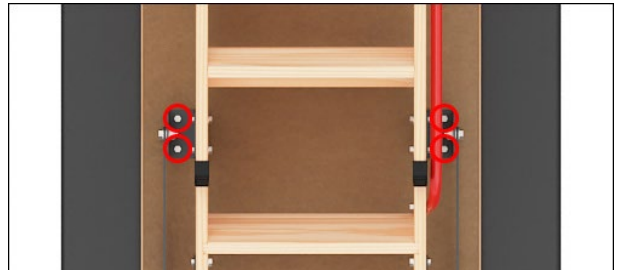

9. Close the attic ladder frame and reconnect the upper and lower stay arms together.

